

(12) UK Patent Application (11) GB 2 274 317 (13) A

(43) Date of A Publication 20.07.1994

(21) Application No 9300744.1

(22) Date of Filing 15.01.1993

(71) Applicant(s)
Spirax-Sarco Limited

(Incorporated in the United Kingdom)

**130-132 St Georges Road, CHELTENHAM,
Gloucestershire, GL50 3EN, United Kingdom**

(72) Inventor(s)
Keith Robert Farquhar

(74) Agent and/or Address for Service
Haseltine Lake & Co
**Hazlitt House, 28 Southampton Buildings, Chancery
Lane, LONDON, WC2A 1AT, United Kingdom**

(51) INT CL⁵
F16L 23/02, F16T 1/38


(52) UK CL (Edition M)
**F2G G14B G14C G2A G2G
F2V VG6
U1S S1605**

(56) Documents Cited
GB 1188711 A US 4350181 A

(58) Field of Search
**UK CL (Edition K) F2G G1 G2A G2Z
INT CL⁵ F16L 23/02, F16T 1/38**


(54) Condensate trap installations

(57) A condensate trap installation comprises a condensate trap 6 and one or more further components such as a strainer 8 and a check valve 10. The condensate trap 6 and the further components 8, 10 are placed in face-to-face engagement at end faces 30 and clamped together by clamping bolts 22 which apply a compressive force by means of a clamping body 18 and a flange 20 provided respectively on pipe ends 2 and 4. An isolating valve 14 is provided to isolate the condensate trap 6 and the components 8, 10 so that they can be removed.

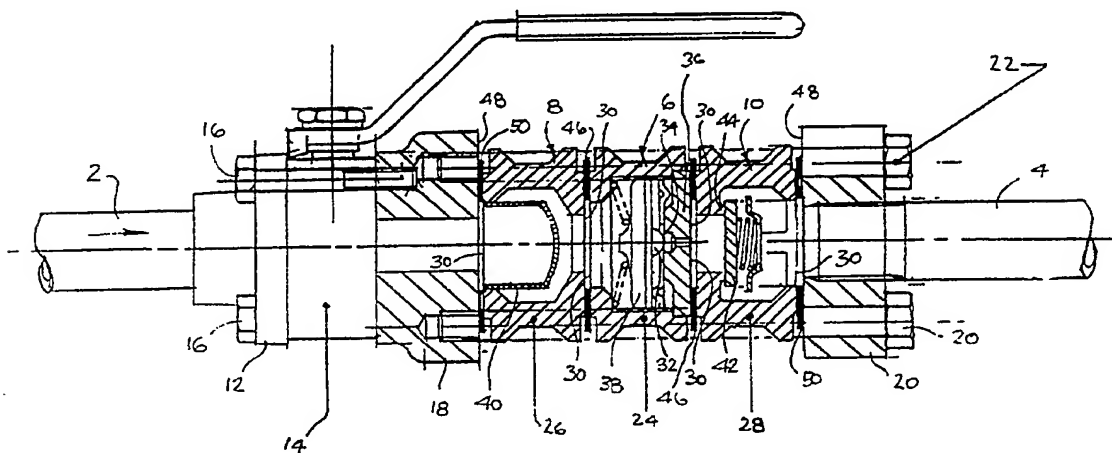

Best Available Copy

GB 2 274 317 A

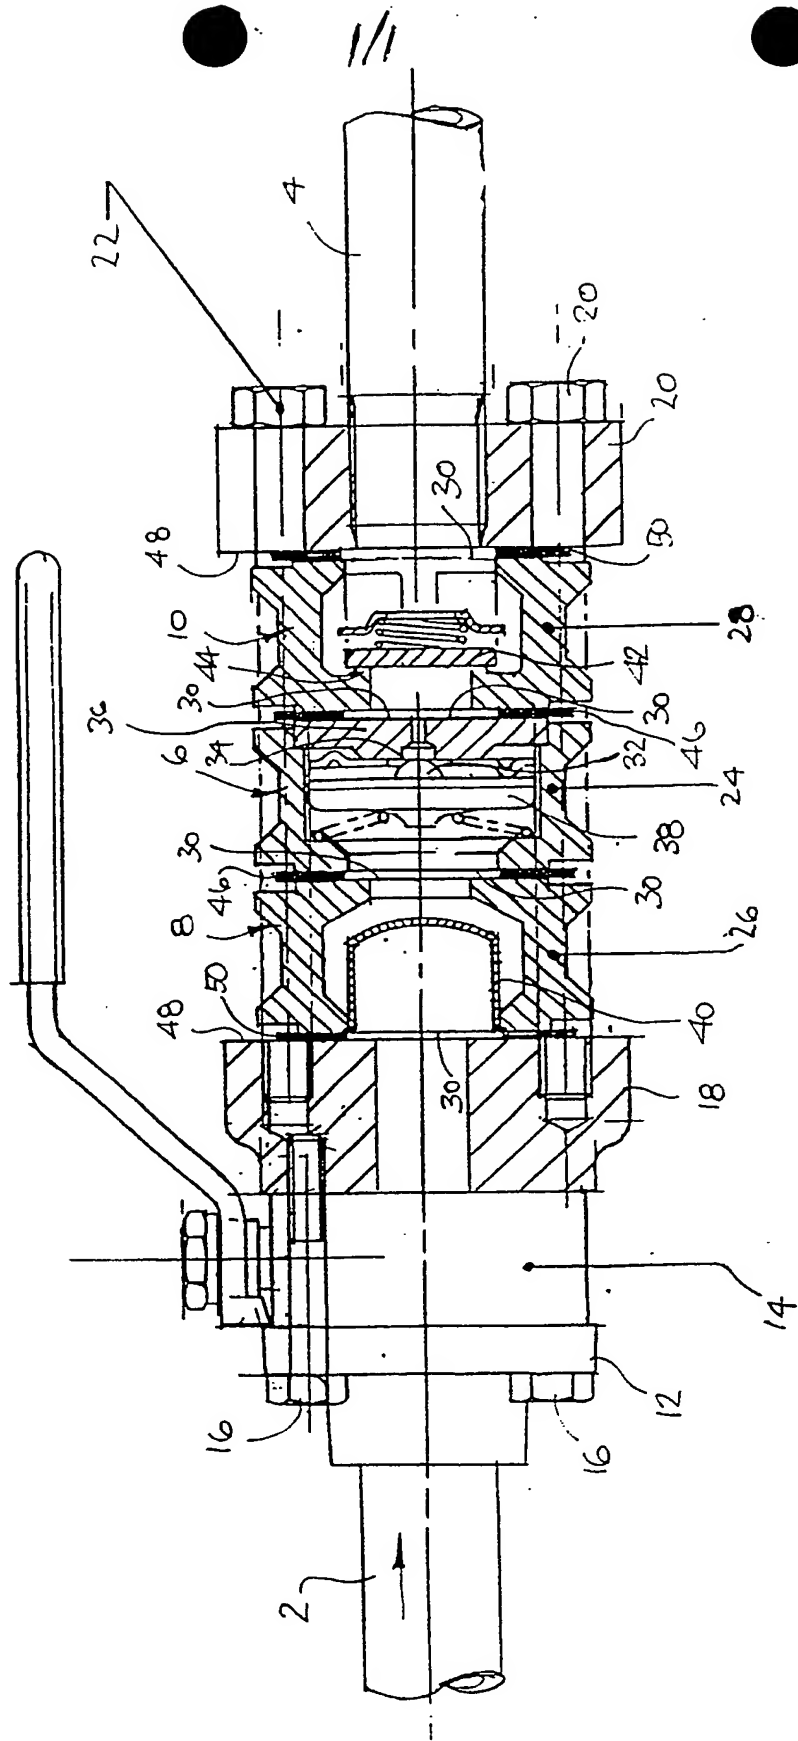

CONDENSATE TRAP INSTALLATIONS

This invention relates to condensate trap installations.

Condensate traps are commonly provided in steam
5 lines for the purpose of discharging condensed water from the steam line while minimizing the escape of steam.

A steam trap typically comprises a housing which accommodates a valve and an actuator for opening and
10 closing the valve in respect to conditions in the steam line. The steam trap housing may also accommodate a strainer to prevent dirt from reaching the steam trap valve, and a check valve in order to prevent reverse
15 fitted in the steam line typically between flanges. Isolating valves may also be required in the steam line so that the steam trap can be isolated if it is to be removed for servicing or replacement.

According to the present invention, there is
20 provided a condensate trap installation comprising the condensate trap and at least one further component, condensate trap and the further component each comprising a housing having oppositely disposed parallel end surfaces, the condensate trap and the
25 further component being clamped together at adjacent end surfaces by clamping means which exerts a compressive force at the end surfaces away from the adjacent end surfaces.

With such a construction, the clamping means not
30 only supports the condensate trap and the further component with respect to each other, but also secures them with respect to the pipeline to which they are fitted. Consequently, by releasing the clamping means, the steam trap and the further component can be
35 separated from each other and from the pipeline.

The further component may be a strainer or a check

valve or other components. There may be more than one further component and, in a preferred installation, a further component in the form of a strainer is provided on one side of the steam trap and a further component
5 in the form of a check valve is provided on the other side.

The clamping means may comprise bolts which clamp the steam trap and the or each further component between two abutment faces which are secured to
10 respective pipe ends. The peripheries of the steam trap and the or each further component may be shaped to receive the clamping bolts in such a way that rotation of the steam trap and the or each further component is prevented once the clamping bolts are in place.

15 The abutment surface on one pipe end may be fixed with respect to the housing of an isolating valve secured to that pipe end. The abutment face on the other pipe end may be provided on a flange secured to that pipe end.

20 For a better understanding of the present invention, and to show how it may be carried into effect, reference will now be made, by way of example, to the accompanying drawing, which shows a sectional view of a steam trap installation.

25 The installation comprises two pipe ends 2 and 4 between which are provided a steam trap 6, a strainer 8 and a check valve 10.

A flange 12 is secured to the pipe end 2 and an isolating valve 14 in the form of a ball valve is
30 secured to the flange 12 by bolts 16 which extend through the housing of the valve 14 into an end body 18. A flange 20 is secured to the pipe end 4, and clamping bolts 22 pass through the flange 20 into the clamping body 18. The clamping bolts 22 pass outside
35 the steam trap 6 and the other components 8, 10, and so form a cage surrounding them. The steam trap 6 and the

other components 8,10 thus lack any provision for securing them together or to the pipeline. The steam trap 6, the strainer 8 and the check valve 10 each comprise a respective housing 24, 26, 28. Each housing 5 has oppositely disposed parallel end faces 30. The housing 24 of the steam trap 6 accommodates a valve comprising a valve element 32 and a valve seat 34 formed in a wall 36 of the housing 24. An actuator 38 supports the valve element 32 for movement into and out 10 of sealing contact with the seat 34.

The housing 26 of the strainer 8 accommodates a strainer element 40, and the housing 28 of the check valve 10 accommodates a spring-loaded check valve element 42 which cooperates with a seat 44.

15 The steam trap 6, the strainer 8 and the check valve 10 are clamped together at their adjacent end faces 30, by the bolts 22. Sealing is provided by gaskets 46. The outer end faces 30 of the strainer 8 and the check valve 10 are engaged by abutment faces 48 20 on the clamping body 18 and the flange 20, through gaskets 50.

As can be appreciated from the Figure, the outer peripheries of the housings 24, 26 and 28 have formations which accommodate the clamping bolts 22 and 25 serve to align the steam trap 6, the strainer 8 and the check valve 10 and prevent their rotation relatively to each other once the clamping bolts 22 are installed.

It will be appreciated that the modular construction of the installation enables the steam trap 30 6 to be combined with one or more further components, such as the strainer 8 and the check valve 10, in order to provide a combination of components appropriate to any particular purpose. Not only may different types of component be selected, but so may components of 35 different characteristics. For example, the check valve 10 may be replaced by one requiring a different

opening pressure. If any one or more of the steam trap and the other components 8 and 10 needs to be removed, for example for inspection, the isolating valve 14 is closed and the clamping bolts 22 are removed. The
5 installation can then be separated into its components without the need to remove any other fasteners, and only that component requiring attention needs to be dismantled.

CLAIMS

1. A condensate trap installation comprising a condensate trap and at least one further component, the condensate trap and the further component each
5 comprising a housing having oppositely disposed parallel end faces, the condensate trap and the further component being clamped together at adjacent respective end faces by clamping means which exerts a compressive force at the end surfaces away from the adjacent end
10 surfaces.
2. A condensate trap installation as claimed in claim 1, in which the further component comprises a strainer and/or a check valve.
3. A condensate trap installation as claimed in
15 claim 1 or 2, in which the further component is one of a plurality of further components.
4. A condensate trap installation as claimed in any one of the preceding claims, in which the clamping means comprises bolts extending between abutment faces
20 between which the condensate trap and/or each further component are situated.
5. A condensate trap installation as claimed in claim 4, in which the peripheries of the condensate trap and the or each further component are provided
25 with formations for receiving the clamping bolts.
6. A condensate trap installation as claimed in claim 4 or 5, in which one of the abutment faces is provided on an isolating valve.
7. A condensate trap installation as claimed in
30 any one of claims 4 to 6, in which one of the abutment faces is provided on a flange.
8. A condensate trap installation substantially as described herein with reference to, and as shown in, the accompanying drawing.

Patents Act 1977

**Examiner's report to the Comptroller under
Section 17 (The Search Report)**

Application Number

GB 9300744.1

Relevant Technical fields

(i) UK Cl (Edition L) F2G (G1 G2A G2Z)

(ii) Int Cl (Edition 5) F16L 23/02
F16T 1/38

Databases (see over)

(i) UK Patent Office

(ii)

Search Examiner

R J DOWNING

Date of Search

16 MARCH 1993

Documents considered relevant following a search in respect of claims 1-8

Category (see over)	Identity of document and relevant passages	Relevant to claim(s)
X	GB 1188711 (GACHOT) See page 1 lines 45-76; page 4 line 119 - page 5 line 11; Figures 9 and 10	1, 3, 4, 7
X	US 4350181 (KREELEY) See column 1 lines 48-66 and Figure 1	1-5, 7

Category	Identity of document and relevant passages	Relevant to claim

Categories of documents

X: Document indicating lack of novelty or of inventive step.

Y: Document indicating lack of inventive step if combined with one or more other documents of the same category.

A: Document indicating technological background and/or state of the art.

P: Document published on or after the declared priority date but before the filing date of the present application.

E: Patent document published on or after, but with priority date earlier than, the filing date of the present application.

&: Member of the same patent family, corresponding document.

Databases: The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.